


Cummins

V504M

Southeastern Power, Inc.

Turbo 240

Marine Diesel

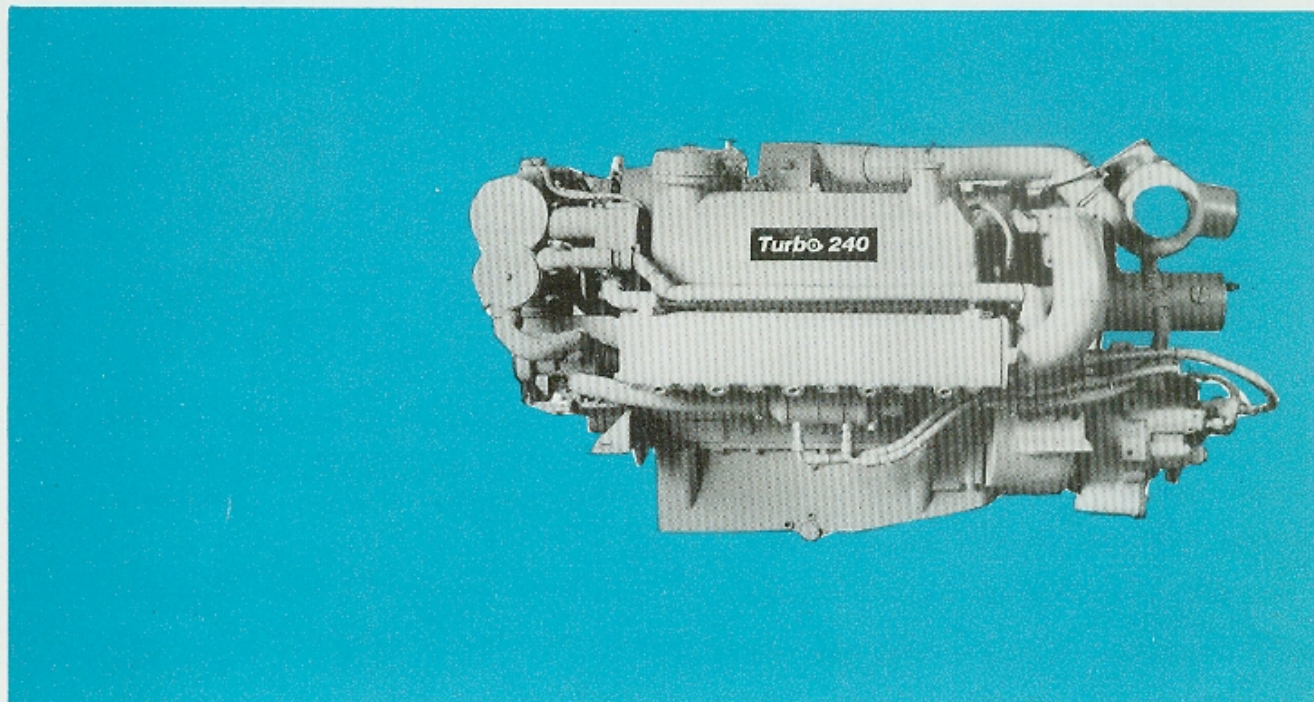

Specifications

Power Rating

Maximum 240 bhp
Rated RPM 3000

Four Stroke Cycle, Turbocharged,
V8 Diesel Engine.

Bore and Stroke 4 $\frac{1}{8}$ x 3 $\frac{3}{4}$ in.
Displacement 504 cu. in.
Oil Pan Capacity 5 U.S. gals.
Net Weight, Dry† 1870 lbs.

†With selected accessories and Twin Disc MG-502 gear.

Optional Borg-Warner and Newage Gears; and instrument panels are available.

Standard Equipment

Accessory Drive: Single-groove front accessory drive pulley.

Air Intake System: Mounted air intake silencer.

Alternator: 12 volt 60 amp negative ground system.

Cooling System: Mounted engine heat exchanger with copper-nickel tube bundle. Gear oil cooler mounted in raw water system. Self priming raw water pump belt driven.

Electrical Accessories: Starter relay and key switches, low oil pressure and high water temperature alarm switches.

Engine Support: Marine type, 22 $\frac{1}{2}$ inch mounting centers. Adjustable vibration isolators.

Exhaust Accessories: Raw water cooled exhaust riser. Holset A2C turbocharger with Hitco heat blanket.

Flywheel Housing and Flywheel: SAE 3 with 11 $\frac{1}{2}$ inch O.C. clutch adaptation.

Filters: Spin-on fuel and water filters. Full-flow lubricating oil filter supplied for customer mounting.

Oil Dipstick: Port or starboard side.

Oil Drain Accessories: Mounted suction hose.

Starter: 12 volt, with high mounting arrangement.

