
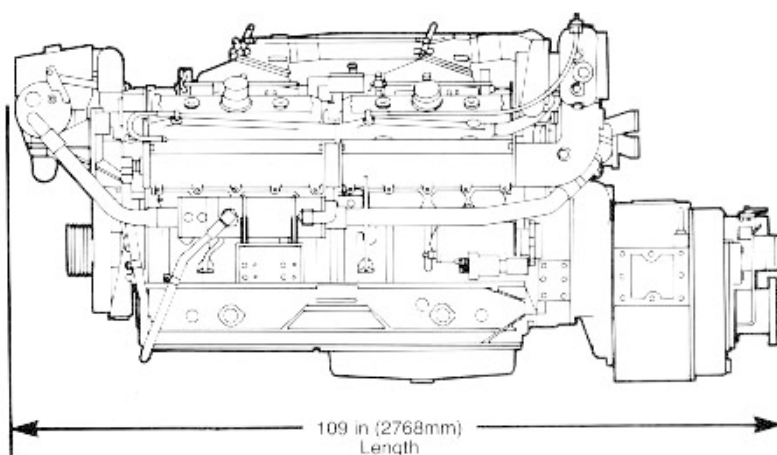


DETROIT DIESEL Series 92

Marine Model 16V-92TA DDEC 1450 BHP

Pleasure Craft

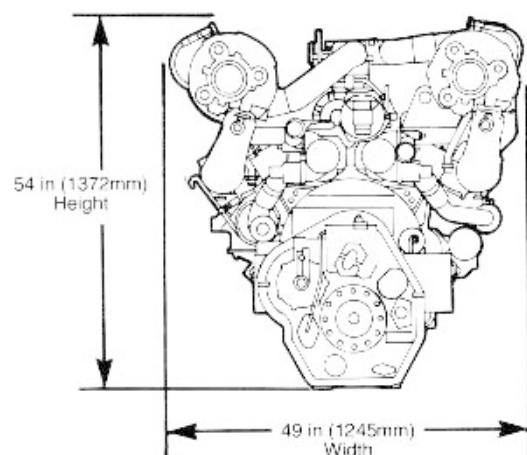

General Specifications

Basic Engine	16V-92TA
Model	8162-7B00
Description	Turbocharged-Aftercooled with Bypass Blower
Control	DDEC
Number of Cylinders	16
Bore and Stroke	4.84 in x 5.00 in (123 mm x 127 mm)
Displacement	1472 cu in (24.1 liters)
Compression Ratio	15.0 to 1
Weight (dry)	7240 lbs (3284 kg)

Rated Power Output—Maximum

Gross Power	1450 BHP (1082 kW) @ 2300 RPM
Net Power	1400 SHP (1044 kW) @ 2300 RPM

Equipment Specifications

Aftercooler	Two-pass with precooled coolant supply (Boostcooler)
Air Inlet Housing	With manual shutdown
Alternator	24 volt, 65 amp
Crankshaft Pulley	5 Grooves, .50 inch wide
DDEC	Detroit Diesel Electronic Control
Engine Mounts	
Exhaust Manifold	Fresh water-cooled manifolds and twin turbine housings
Flywheel Housing	SAE #1
Fuel System	Electronic unit injectors with low pressure USCG type A external hoses, fuel filters and cooler
Heat Exchanger	Includes 2 raw water pumps & piping
Lube Oil Filter	Dual full flow, spin on
Marine Gear	Detroit Diesel-272EV (1.18, 1.50, 1.74, 2.04)
Oil Pan	Stamped steel for 0-15° inclination angle, rear sump
Starting Motors	Two 24 volt
Vibration Damper	Viscous torsional damper

Rating conditions: ISO 3046, SAE J1349, SAE J1228
77°F (25°C) and 29.31 in. Hg. (99kPa) Barometer (Dry)

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Corporation representative.

Illustration represents a typical marine engine