


## principal dimensions

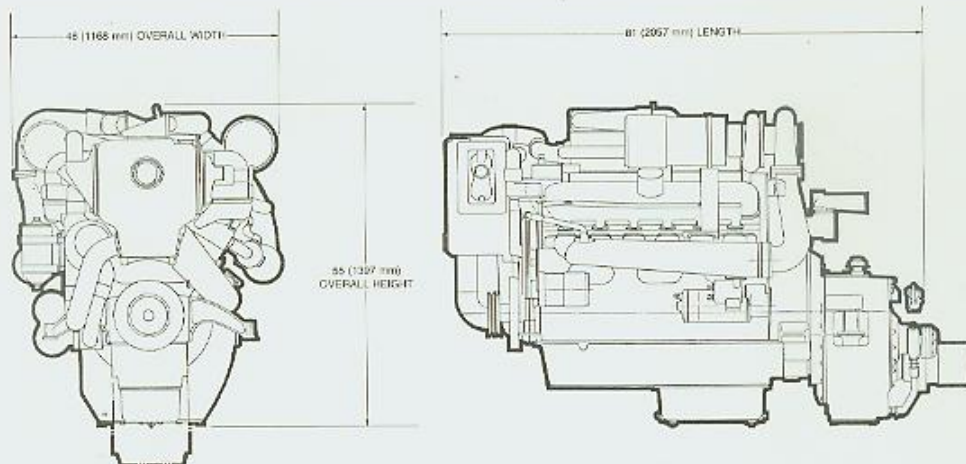

For complete dimensional information, refer to installation drawing 2SA367.

## standard equipment

**Air Box Drain Tubes**

**Air Inlet Housing**

**Air Silencers**

**Alternator**—24 v, 65 amp

**Cast Aluminum Rocker Covers**

**Crankshaft Pulley**

**Engine Mounts**—Includes mounts for engine and marine gear

**Exhaust Manifold**—Water-cooled

**Flywheel Housing**—SAE #1

**Governor**—Variable Speed, includes throttle controls

**Heat Exchanger**—Includes raw water pump and piping

**Instruments**—Includes ammeter, Hour-meter, tachometer, water temperature gauge, and oil pressure gauges for engine and marine gear

**Lube Oil Filter**—Full-flow filter

**Marine Gear**—Twin Disc hydraulic reverse and reduction gear, 2 to 1 ratio

**Oil pan and Distribution System**—Stamped oil pan for 15° inclination angle, rear sump

**Starting Motor**—24 volt

**Water Filter**—Fresh water filter with 30-gallon (113.6 litres) capacity

For a complete listing of standard and optional equipment, consult your authorized Detroit Diesel Allison representative.

Specifications subject to change without notice.



**Detroit Diesel Allison**  
Division of General Motors Corporation

13400 West Outer Drive Detroit, Michigan 48228

In Canada: Diesel Division, General Motors of Canada Limited, London, Ontario