



Configurations and Dimensions (continued)

E. V-Drive Remote Mount

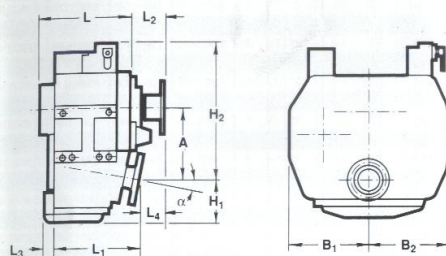

F. U-Drive Remote Mount (S)

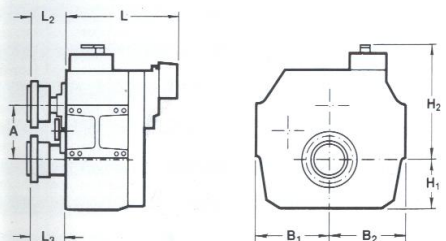

MODEL	CONFIG.	α	inches (mm)												Approx. Oil Cap. qt. (Liter)	Approx. Weight lb. (kg)
			A	B ₁	B ₂	H ₁	H ₂	L	L ₁	L ₂	L ₃	L ₄	L ₅	L ₆		
IRM 220 V-2	E	10	5.69(144.5)	7.38 (187.5)	7.38 (187.5)	4.55 (115.5)	9.09 (231)	9.84 (250)	9.70 (246.4)	4.13 (105)	—	—	—	—	4.2 (4)	143
IRM 350 V	E	7	7.69(195.2)	11.42 (290)	11.42 (290)	5.63 (143)	15.75 (400)	16.93 (430)	17.72 (450)	5.55 (141)	—	—	—	—	2.83 (72)	551
BW 155 V	E	10	10.61(269.4)	12.20 (310)	12.20 (310)	6.14 (156)	21.65 (550)	16.22 (412)	17.80 (452)	6.85 (174)	—	—	—	—	3.74 (95)	573
BW 160 V	E	10	10.87 (276)	12.01 (305)	12.01 (305)	5.67 (144)	22.17 (563)	19.09 (485)	17.09 (434)	7.68 (195)	0.98 (25)	2.80 (71)	21.2 (20)	21.2 (20)	2.80 (71)	630
BW 165 V	E	10	10.87 (276)	12.01 (305)	12.01 (305)	5.67 (144)	22.17 (563)	19.09 (485)	17.09 (434)	7.68 (195)	0.98 (25)	2.80 (71)	21.2 (20)	21.2 (20)	2.80 (71)	630
BW 165 VP3	E	10	10.87 (276)	12.01 (305)	12.01 (305)	5.67 (144)	22.17 (563)	19.09 (485)	17.09 (434)	7.68 (195)	0.98 (25)	2.80 (71)	21.2 (20)	21.2 (20)	2.80 (71)	644
BW 165 VP4	E	10	10.93(277.6)	12.01 (305)	12.01 (305)	5.59 (142)	22.24 (565)	19.09 (485)	17.47(443.05)	7.95 (202)	0.98 (25)	2.42 (61.35)	21.2 (20)	21.2 (20)	2.42 (61.35)	749
BW 190 V	E	10	11.65 (296)	13.39 (340)	13.39 (340)	6.26 (159)	23.50 (597)	15.87 (403)	17.20 (437)	8.86 (225)	1.81 (46)	4.65 (118)	24.4 (23)	24.4 (23)	4.65 (118)	754
BW 195 V	E	10	11.65 (296)	13.39 (340)	13.39 (340)	6.26 (159)	23.50 (597)	15.87 (403)	17.20 (437)	8.86 (225)	1.81 (46)	4.65 (118)	24.4 (23)	24.4 (23)	4.65 (118)	758
BW 195 VP1	E	10	11.65 (296)	13.39 (340)	13.39 (340)	6.26 (159)	23.50 (597)	15.87 (403)	17.20 (437)	8.86 (225)	1.81 (46)	4.65 (118)	24.4 (23)	24.4 (23)	4.65 (118)	1017
BW 250 V	E	10	11.57 (294)	13.39 (340)	8.11 (206)	23.50 (597)	24.92 (633)	21.22 (539)	6.10 (155)	—	—	2.20 (56)	—	—	27.6 (26)	1023
BW 255 VVP	E	10	11.57 (294)	13.39 (340)	8.11 (206)	23.50 (597)	24.92 (633)	21.22 (539)	6.10 (155)	—	—	2.20 (56)	—	—	27.6 (26)	1023
BW 465-1 V	E	8	15.14(384.5)	17.52 (445)	17.52 (445)	9.70 (246.5)	26.56 (675.5)	23.54 (598)	21.22 (539)	9.33 (237)	2.28 (58)	3.66 (93)	—	—	63.6 (60)	1677
BW 450-1S	F	—	12.20 (310)	17.52 (445)	17.52 (445)	12.32 (313)	25.67 (652)	25.71 (653)	—	2.24 (57)	5.67 (144)	—	—	—	63.6 (60)	1686
BW 460 S	F	—	12.20 (310)	17.52 (445)	17.52 (445)	12.32 (313)	25.67 (652)	25.71 (653)	—	2.24 (57)	5.67 (144)	—	—	—	63.6 (60)	1686
BW 460-1 S	F	—	12.20 (310)	17.52 (445)	17.52 (445)	12.32 (313)	25.67 (652)	25.71 (653)	—	2.24 (57)	5.67 (144)	—	—	—	63.6 (60)	1695
BW 465 S	F	—	12.20 (310)	17.52 (445)	17.52 (445)	12.32 (313)	25.67 (652)	25.71 (653)	—	2.24 (57)	5.67 (144)	—	—	—	63.6 (60)	1695
BW 465-1 S	F	—	12.20 (310)	17.52 (445)	17.52 (445)	12.32 (313)	25.67 (652)	25.71 (653)	—	2.24 (57)	5.67 (144)	—	—	—	63.6 (60)	1695
BW 750 S	F	—	13.39 (340)	19.69 (500)	19.69 (500)	13.70 (348)	27.32 (694)	29.88 (759)	—	5.75 (146)	4.72 (120)	—	—	—	79.5 (75)	2050
BW 755 S	F	—	13.39 (340)	19.69 (500)	19.69 (500)	13.70 (348)	27.32 (694)	29.88 (759)	—	5.75 (146)	4.72 (120)	—	—	—	79.5 (75)	2050
BW 755-1 S	F	—	13.39 (340)	19.69 (500)	19.69 (500)	13.70 (348)	27.32 (694)	29.88 (759)	—	5.75 (146)	5.12 (130)	—	—	—	42.4 (40.0)	2952
BW 1200 S	F	—	12.60 (320)	19.09 (485)	13.19 (335)	11.61 (295)	32.01 (813)	38.78 (985)	—	11.81 (300)	7.09 (180)	—	—	—	111.3 (105)	3415
BW 1201 S	F	—	12.60 (320)	19.09 (485)	13.19 (335)	11.61 (295)	32.01 (813)	38.78 (985)	—	11.81 (300)	7.09 (180)	—	—	—	111.3 (105)	3415
BW 1555 S	F	—	12.60 (320)	19.09 (485)	13.19 (335)	11.61 (295)	32.01 (813)	38.78 (985)	—	11.81 (300)	7.09 (180)	—	—	—	111.3 (105)	3458
BW 1556 S	F	—	12.60 (320)	19.09 (485)	13.19 (335)	11.61 (295)	32.01 (813)	38.78 (985)	—	11.81 (300)	7.09 (180)	—	—	—	111.3 (105)	3458

* Dimensions and weights refer to transmissions excluding options such as:
 * trolling valves, power take-offs, propeller shaft companion flanges, torsional couplings etc.