



Installation dimensions

BW 250
BW 255
BW 256



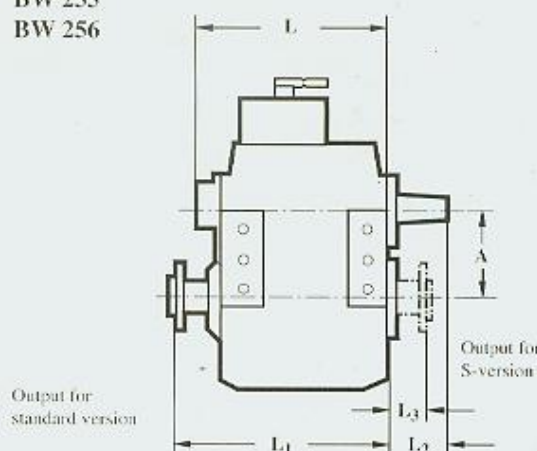


Output for
standard version

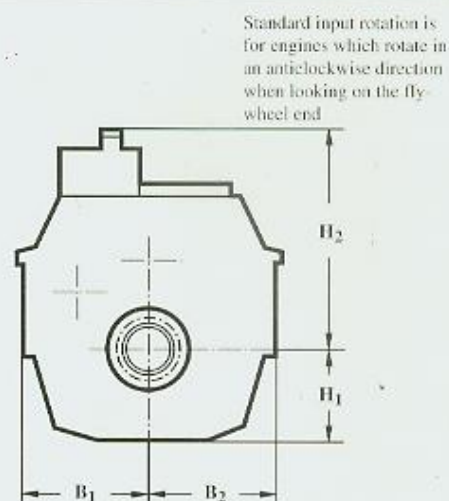

TYPE	DIMENSIONS mm / inches										Oil capacity	Weight (dry)
	A	B ₁	B ₂	H ₁	H ₂	L	L ₁	L ₂	L ₃ (SAE h.b.)	α	approx. l / qt.	approx. kg / lb
BW 250	235 / 9.25	340 / 13.39	340 / 13.39	250 / 9.84	572 / 22.52	616 / 24.25	565 / 22.24	151 / 5.94	120 / 4.72	-	28 / 29.7	459 / 1,012
BW 255	235 / 9.25	340 / 13.39	340 / 13.39	250 / 9.84	572 / 22.52	616 / 24.25	565 / 22.24	151 / 5.94	120 / 4.72	-	28 / 29.7	469 / 1,032
BW 256	360 / 14.17	375 / 14.76	375 / 14.76	395 / 15.55	697 / 27.44	616 / 24.25	625 / 24.61	151 / 5.94	120 / 4.72	-	55 / 58.3	666 / 1,468

BW 250 A / V
BW 255 P / A / AP / V / VP
BW 256 P

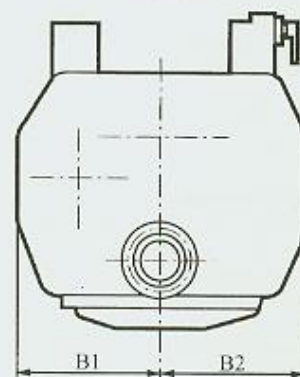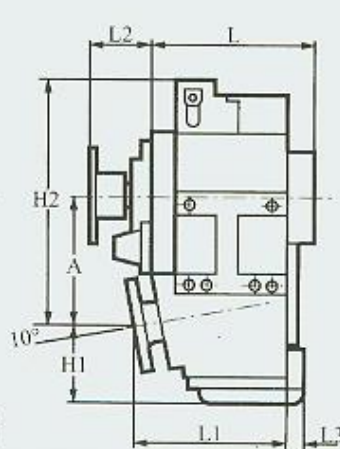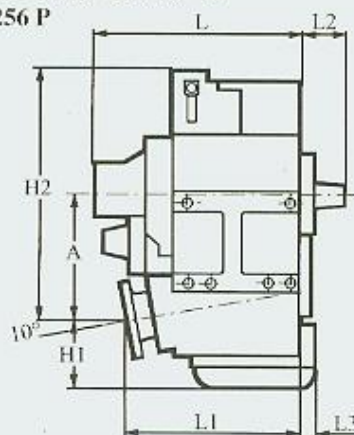

TYPE	DIMENSIONS mm / inches									Oil capacity approx.	Weight (dry) approx.	
	A	B ₁	B ₂	H ₁	H ₂	L	L ₁	L ₂	L ₃ (SAE h.h.)			
BW 250 A	294 / 11.57	340 / 13.39	340 / 13.39	206 / 8.11	633 / 24.92	616 / 24.25	540 / 21.26	151 / 5.94	120 / 4.72	10	32 / 33.9	469 / 1,032
BW 250 V	294 / 11.57	340 / 13.39	206 / 8.11	597 / 23.50	633 / 24.92	539 / 21.22	155 / 6.10	—	56 / 2.20	10	26 / 27.6	462 / 1,017
BW 255 P	235 / 9.25	340 / 13.39	340 / 13.39	250 / 9.84	572 / 22.52	616 / 24.25	565 / 22.24	151 / 5.94	120 / 4.72	-	28 / 29.7	469 / 1,032
BW 255 A/AP	294 / 11.57	340 / 13.39	340 / 13.39	206 / 8.11	633 / 24.92	616 / 24.25	540 / 21.26	151 / 5.94	120 / 4.72	10	32 / 33.9	471 / 1,038
BW 255 V/VP	294 / 11.57	340 / 13.39	206 / 8.11	597 / 23.50	633 / 24.92	539 / 21.22	155 / 6.10	—	56 / 2.20	10	26 / 27.6	462 / 1,017
BW 256 P	360 / 14.17	375 / 14.76	375 / 14.76	395 / 15.55	697 / 27.44	616 / 24.25	625 / 24.61	151 / 5.94	120 / 4.72	-	55 / 58.3	666 / 1,468