


M439 Series, 22-55 kW

M439 Series


M439T, 55 kW
at 1800 RPM,
shown with
heat exchanger
cooling (10),
optional
hydrolastic
mounts (18)
and front
power take-off
with electric
clutch (22).

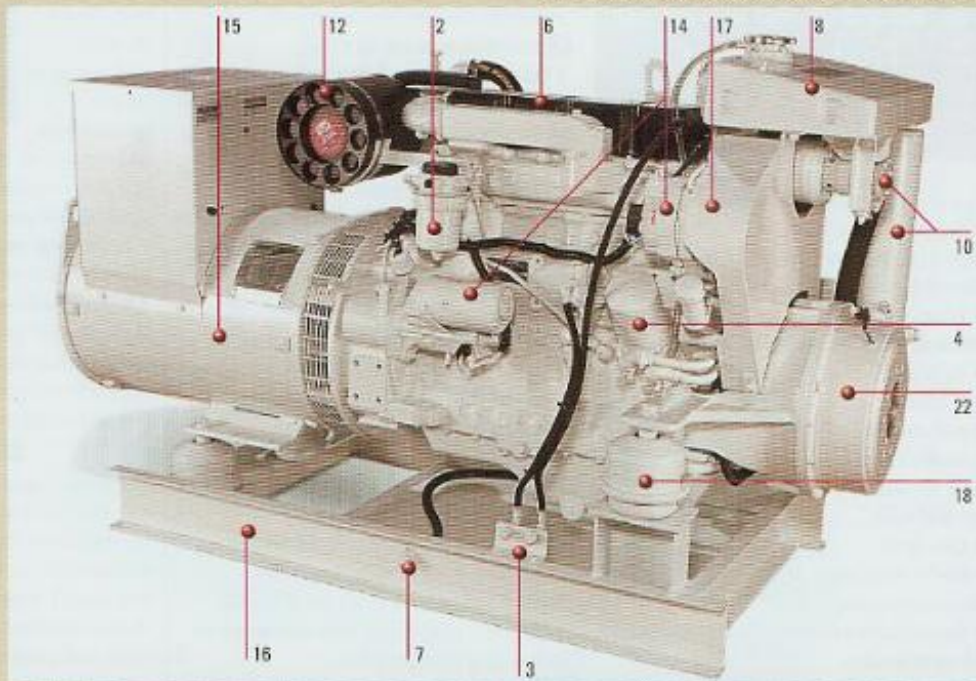

M445 Series, 30-65 kW

M445 Series

M445D, 45 kW
at 1800 RPM,
shown with heat
exchanger
cooling (10),
optional
hydrolastic
mounts (18)
and wet exhaust
elbow (13).

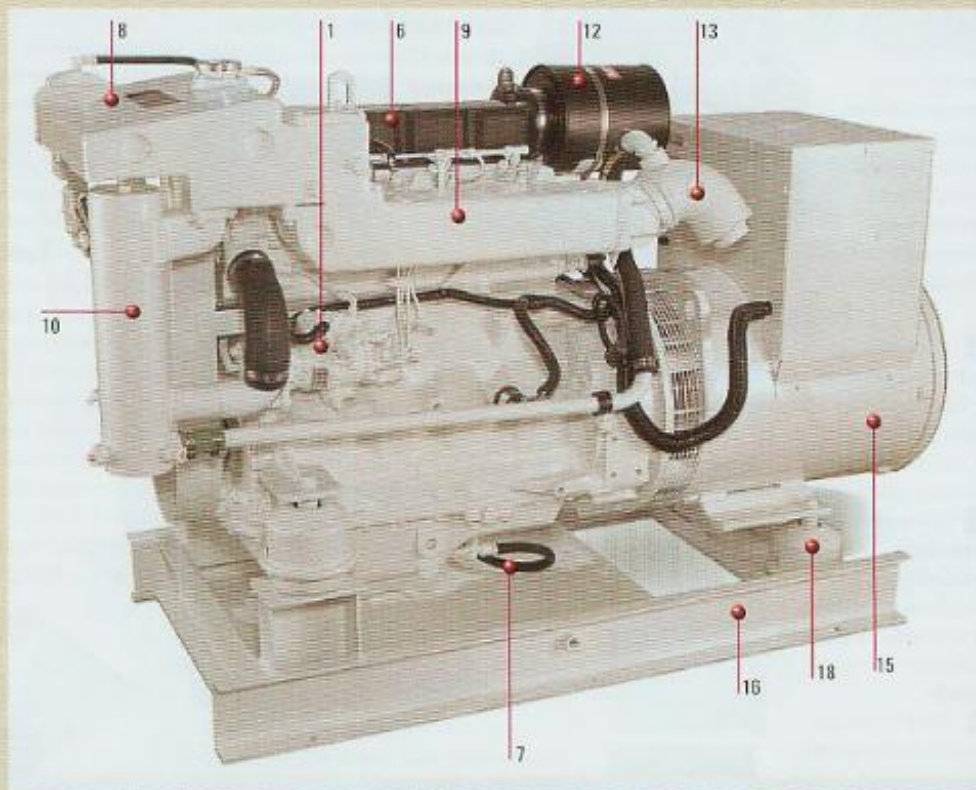

• See pages 4 and 6
for numbered
feature descriptions.